CHENG FENG 成豐



CF-6039

Automatic Template Machine
自动模板机

	2	3500RPM	DP×17 75/11



1. Suitable for automatically sewing shirt collar, cuff, pocket flap, etc.
2. Adopt PLC and user friendly touch screen for easy operation
3. Preset sewing pattern according to different plastic stitch jig to make sure that every cutting piece has the same sewing effect, so as to improve working efficiency and product quality greatly
4. The sewing speed and stitch length can be adjusted to meet different sewing demands
5. Special collar point positioning and automatic sparse or dense sewing to make a smooth round or sharp corner collar
6. Self R&D synchronous core technology, stitch performs along plastic stitch jig to get a better sewing effect
7. Equipped with fabric trimming cutter to trim fabric edge automatically for efficiency improving
8. Max. processable collar length 500mm
9. The whole sewing process is fully automated that even unskilled worker can handle it with ease
10. Customers can purchase CF-101 additionally to fabricate stitch jigs of various shapes used on this machine

Standard: Sewing machine(JUKI DDL-9000B-SS-OB/CP18A)

1. 适用于自动车缝领，袖口，袋盖等恤衫裁片
2. 采用PLC可编程控制器和人性化触摸显示屏，操作方便快捷
3. 可根据胶板模型，预设车缝图样，使每件裁片车缝效果一致，大大提高工作效率及质量
4. 车缝速度和针步长度可调，满足不同车缝需求
5. 独特的领尖定位功能和自动疏密针，可使车缝的尖角和圆角更自然顺滑
6. 自主研发同步核心技术，针步、模板同步处理，车缝效果更佳
7. 备布边修剪器，实现自动修剪布边，提高工作效率
8. 最长缝领长度为500mm
9. 整个车缝工序均自动化，适合生手工人操作
10. 客户可选购CF-101制作不同形状的胶板模型配合本机使用

跟机件：缝纫机(JUKI DDL-8000A-SMSOBAKK)300~360个
口袋跟机件：缝纫机(JUKI DDL-9000B-SS-OB)





壓領工作中
Stitching collar

壓袖口工作中
Stitching cuff



轉彎感應系統
Corner turning sensing system




人性化觸摸屏操作設定界面
User friendly touch screen for




不銹鋼台面，耐磨性更高
Stainless steel table top, high


跟機模 Standards:



選購件 options:
















跟機模：
1. 尖角領模(標准)
2. 圓角袖口模(標准)

選購件：
3~5. 領模
6. 六角袖口模
7. 袋蓋模
8. NS-101链纫夹羅坑機

Standards:
1. Sharp angle collar stitch jig (standa
2. Round corner cuff stitch jig (standa

Options:
3~5. Collar stitch jig
6. Hexagon cuff stitch jig
7. Pocket flap stitch jig
8. NS-101 Stitch Profile Clamp Milling Machine

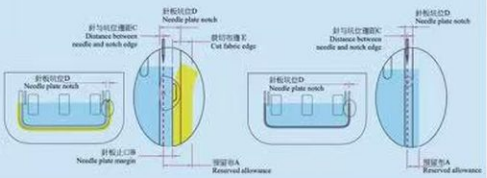

針板止口B Needle plate margin B		針板坑位D(mm) Needle plate notch D	預留布A(mm) Reserved allowance A	針與坑位邊距C(mm) Distance between needle and notch edge C	裁切布邊E(mm) Cut fabric edge E	切刀狀態 With or without cutter	備註 Remarks
Inch	mm						
–	–	4	6	1.25	–	無 without	跟機 Standard
1/8	3.2	9	13	2	9.8	有 with	選購 Option
3/16	4.8	11	15	2	10.2	有 with	跟機Standard
1/4	6.4	13	17	2	10.6	有 with	選購 Option
5/16	8	14	18	2	10	有 with	選購 Option
3/8	9.5	16	20	2	10.5	有 with	選購 Option

型号 Model：CF-6039	Model：CF-6039
通用缝纫机机型:Juki-DDL-8000A	Applicable Sewing Machine Head Model: Juki-DDL-8000A
电源:1PH/220V/50Hz	Power Supply:1PH/220V/50Hz
总功率 (Kw):0.9	Total Power (Kw):0.9
工作台面尺寸 (LxW) (mm):1220x830	Working Table Size (mm):1220x830
压缩空气压力 (kgf/cm²):5	Compressed Air Pressure (kgf/cm²):5
最大转速 (RPM): 3000-3500	Max Speed(RPM):3000-3500
产能效率(Per Hour): 1500-2300领/8小时 2300-2800袖克夫/8小时	Production Capacity (Per Hour)：1500-2300collar/8h 2300-2800cuff/8h
装箱尺寸【长*宽*高】(mm):1.32 X 0.9 X 1.5	Packing Size 【L*W*H】(mm): 1.32 X 0.9 X 1.5
毛重 (KG):220	Gross Weight (KG): 200

图片和参数只供参考，产品规格和外观的修改，恕不另行通知
Images and parameters are for reference only. Product specifications and appearance may be modified without prior notice.